








	<table><tr><th>Amp.</th><th>16</th><th>16</th><th>32</th><th>32</th><th>32</th></tr><tr><th>Pole</th><th>4</th><th>5</th><th>3</th><th>4</th><th>5</th></tr><tr><td>d</td><td>150-161</td><td>150-161</td><td>173-185</td><td>173-185</td><td>174-183</td></tr><tr><td>Øe</td><td>65</td><td>65</td><td>72</td><td>72</td><td>72</td></tr><tr><td>e1</td><td>35</td><td>35</td><td>38,5</td><td>38,5</td><td>38,5</td></tr><tr><td>f</td><td>63</td><td>71</td><td>75</td><td>75</td><td>83</td></tr><tr><td>m</td><td>111</td><td>111</td><td>128</td><td>128</td><td>128</td></tr><tr><td>n</td><td>37</td><td>37</td><td>45,5</td><td>45,5</td><td>45,5</td></tr><tr><td>Øp</td><td>7,5 - 18,5</td><td>7,5-18,5</td><td>10 - 22,5</td><td>10 - 22,5</td><td>10 - 22,5</td></tr></table>	Amp.	16	16	32	32	32	Pole	4	5	3	4	5	d	150-161	150-161	173-185	173-185	174-183	Øe	65	65	72	72	72	e1	35	35	38,5	38,5	38,5	f	63	71	75	75	83	m	111	111	128	128	128	n	37	37	45,5	45,5	45,5	Øp	7,5 - 18,5	7,5-18,5	10 - 22,5	10 - 22,5	10 - 22,5	Stecker, schraubenlos, mit Schneidklemmtechnik, mit außenliegender Kabelverschraubung, IP 44 🔥 <u>Leiterquerschnitte:</u> 16 A: 1 - 2,5 mm² / 32 A: 2,5 - 6 mm² <u>Kabeldurchmesser:</u> 16 A: 7,5 - 18,5 mm / 32 A: 10 - 22,5 mm
Amp.	16	16	32	32	32																																																			
Pole	4	5	3	4	5																																																			
d	150-161	150-161	173-185	173-185	174-183																																																			
Øe	65	65	72	72	72																																																			
e1	35	35	38,5	38,5	38,5																																																			
f	63	71	75	75	83																																																			
m	111	111	128	128	128																																																			
n	37	37	45,5	45,5	45,5																																																			
Øp	7,5 - 18,5	7,5-18,5	10 - 22,5	10 - 22,5	10 - 22,5																																																			
	<table><tr><th>Amp.</th><th>16</th><th>16</th><th>32</th><th>32</th><th>32</th></tr><tr><th>Pole</th><th>4</th><th>5</th><th>3</th><th>4</th><th>5</th></tr><tr><td>d</td><td>150-161</td><td>150-161</td><td>173-185</td><td>173-185</td><td>174-183</td></tr><tr><td>Øe</td><td>65</td><td>65</td><td>72</td><td>72</td><td>72</td></tr><tr><td>e1</td><td>35</td><td>35</td><td>38,5</td><td>38,5</td><td>38,5</td></tr><tr><td>f</td><td>63</td><td>71</td><td>75</td><td>75</td><td>83</td></tr><tr><td>m</td><td>111</td><td>111</td><td>128</td><td>128</td><td>128</td></tr><tr><td>n</td><td>37</td><td>37</td><td>45,5</td><td>45,5</td><td>45,5</td></tr><tr><td>Øp</td><td>7,5 - 18,5</td><td>7,5-18,5</td><td>10 - 22,5</td><td>10 - 22,5</td><td>10 - 22,5</td></tr></table>	Amp.	16	16	32	32	32	Pole	4	5	3	4	5	d	150-161	150-161	173-185	173-185	174-183	Øe	65	65	72	72	72	e1	35	35	38,5	38,5	38,5	f	63	71	75	75	83	m	111	111	128	128	128	n	37	37	45,5	45,5	45,5	Øp	7,5 - 18,5	7,5-18,5	10 - 22,5	10 - 22,5	10 - 22,5	Stecker, Schraubanschluss mit außenliegender Kabelverschraubung, IP 44 🔥 <u>Leiterquerschnitte:</u> 16 A: 1 - 2,5 mm² / 32 A: 2,5 - 6 mm² <u>Kabeldurchmesser:</u> 16 A: 7,5 - 18,5 mm / 32 A: 10 - 22,5 mm
Amp.	16	16	32	32	32																																																			
Pole	4	5	3	4	5																																																			
d	150-161	150-161	173-185	173-185	174-183																																																			
Øe	65	65	72	72	72																																																			
e1	35	35	38,5	38,5	38,5																																																			
f	63	71	75	75	83																																																			
m	111	111	128	128	128																																																			
n	37	37	45,5	45,5	45,5																																																			
Øp	7,5 - 18,5	7,5-18,5	10 - 22,5	10 - 22,5	10 - 22,5																																																			
	<table><tr><th>Amp.</th><th>16</th><th colspan="3">63</th></tr><tr><th>Pole</th><th>3</th><th>3</th><th>4</th><th>5</th></tr><tr><td>d</td><td>143</td><td>252</td><td>252</td><td>252</td></tr><tr><td>Øe</td><td>51</td><td>81</td><td>81</td><td>81</td></tr><tr><td>f</td><td>60</td><td>97</td><td>97</td><td>97</td></tr><tr><td>m</td><td>108</td><td>192</td><td>192</td><td>192</td></tr><tr><td>n</td><td>37</td><td>67</td><td>67</td><td>67</td></tr><tr><td>Øp</td><td>7/13</td><td>15/33</td><td>15/33</td><td>15/33</td></tr></table>	Amp.	16	63			Pole	3	3	4	5	d	143	252	252	252	Øe	51	81	81	81	f	60	97	97	97	m	108	192	192	192	n	37	67	67	67	Øp	7/13	15/33	15/33	15/33	Stecker, Schraubanschluss, mit Kabelknickschutz, IP 44 🔥														
Amp.	16	63																																																						
Pole	3	3	4	5																																																				
d	143	252	252	252																																																				
Øe	51	81	81	81																																																				
f	60	97	97	97																																																				
m	108	192	192	192																																																				
n	37	67	67	67																																																				
Øp	7/13	15/33	15/33	15/33																																																				
	<table><tr><th>Amp.</th><th>16</th></tr><tr><th>Pole</th><th>3</th></tr><tr><td>d</td><td>133</td></tr><tr><td>Øe</td><td>50</td></tr><tr><td>f</td><td>59</td></tr><tr><td>n</td><td>37</td></tr><tr><td>Øp</td><td>7/13</td></tr></table>	Amp.	16	Pole	3	d	133	Øe	50	f	59	n	37	Øp	7/13	Stecker mit Crimpkontakten, schraubenlos, mit angespritztem Knickschutz, IP 44 🔥 wartungsfrei, nicht wieder anschließbar, geschützt vor ungefugtem Eingriff oder Stecker mit Schraubkontakten, mit angespritztem Knickschutz, IP 44 🔥 wieder anschließbar																																								
Amp.	16																																																							
Pole	3																																																							
d	133																																																							
Øe	50																																																							
f	59																																																							
n	37																																																							
Øp	7/13																																																							
	<table><tr><th>Amp.</th><th>16</th></tr><tr><th>Pole</th><th>3</th></tr><tr><td>d</td><td>111</td></tr><tr><td>Øe</td><td>51</td></tr><tr><td>f</td><td>60</td></tr><tr><td>m</td><td>108</td></tr><tr><td>n</td><td>37</td></tr><tr><td>Øp</td><td>8/15</td></tr></table>	Amp.	16	Pole	3	d	111	Øe	51	f	60	m	108	n	37	Øp	8/15	Stecker, Schraubanschluss, mit innenliegendem Kabelknickschutz, IP 44 🔥																																						
Amp.	16																																																							
Pole	3																																																							
d	111																																																							
Øe	51																																																							
f	60																																																							
m	108																																																							
n	37																																																							
Øp	8/15																																																							
	<table><tr><th>Amp.</th><th>16</th></tr><tr><th>Pole</th><th>3</th></tr><tr><td>d</td><td>143</td></tr><tr><td>e</td><td>51</td></tr><tr><td>f</td><td>60</td></tr><tr><td>m</td><td>108</td></tr><tr><td>n</td><td>37</td></tr><tr><td>Øp</td><td>7/13</td></tr><tr><td>u</td><td>61</td></tr></table>	Amp.	16	Pole	3	d	143	e	51	f	60	m	108	n	37	Øp	7/13	u	61	Stecker, Schraubanschluss, mit Kabelknickschutz, mit Öse für Vorhängeschloss zum Verschließen mit der Anbaudose 512 306, 512 304 und 512 309, IP 44 🔥																																				
Amp.	16																																																							
Pole	3																																																							
d	143																																																							
e	51																																																							
f	60																																																							
m	108																																																							
n	37																																																							
Øp	7/13																																																							
u	61																																																							

 2 P + E	 3 P + E	 3 P + N + E	Ampère	Polzahl	110 V 50 u. 60 Hz 3pol. 4pol. 5pol. 4h 4h 4h	230 V 50 u. 60 Hz 3pol. 4pol. 5pol. 6h 9h 9h	400 V 50 u. 60 Hz 3pol. 4pol. 5pol. 9h 6h 6h	500 V 50 u. 60 Hz 3pol. 4pol. 5pol. 7h 7h 7h	> 50 - 500 V 100 - 300 Hz 3pol. 4pol. 5pol. 10h 10h 10h	> 50 - 500 V ü. 300 - 500 Hz 3pol. 4pol. 5pol. 2h 2h 2h			2
Artikelnummern													


	<table><tr><td>Amp.</td><td>16</td><td>32</td></tr><tr><td>Pole</td><td>5</td><td>5</td></tr><tr><td>d</td><td>153</td><td>181</td></tr><tr><td>Øe</td><td>65</td><td>72</td></tr><tr><td>f</td><td>75</td><td>88</td></tr><tr><td>m</td><td>117</td><td>138</td></tr><tr><td>n</td><td>37</td><td>46</td></tr><tr><td>Øp</td><td>8/21</td><td>11/24</td></tr></table>	Amp.	16	32	Pole	5	5	d	153	181	Øe	65	72	f	75	88	m	117	138	n	37	46	Øp	8/21	11/24	Phasenwender, Schraubanschluss, mit Kabelknickschutz, IP 44 ⚡																																																								
Amp.	16	32																																																																																
Pole	5	5																																																																																
d	153	181																																																																																
Øe	65	72																																																																																
f	75	88																																																																																
m	117	138																																																																																
n	37	46																																																																																
Øp	8/21	11/24																																																																																
	<table><tr><td>Amp.</td><td>16</td><td>32</td></tr><tr><td>Pole</td><td>5</td><td>5</td></tr><tr><td>d</td><td>131</td><td>155</td></tr><tr><td>Øe</td><td>65</td><td>73</td></tr><tr><td>f</td><td>75</td><td>88</td></tr><tr><td>m</td><td>112</td><td>133</td></tr><tr><td>n</td><td>37</td><td>46</td></tr><tr><td>Øp</td><td>7,5 - 14,5</td><td>10 - 19,5</td></tr></table>	Amp.	16	32	Pole	5	5	d	131	155	Øe	65	73	f	75	88	m	112	133	n	37	46	Øp	7,5 - 14,5	10 - 19,5	Phasenwender, Schraubanschluss, mit Trompetenverschraubung, IP 44 ⚡																																																								
Amp.	16	32																																																																																
Pole	5	5																																																																																
d	131	155																																																																																
Øe	65	73																																																																																
f	75	88																																																																																
m	112	133																																																																																
n	37	46																																																																																
Øp	7,5 - 14,5	10 - 19,5																																																																																
	<table><tr><td>Amp.</td><td colspan="3">16</td><td colspan="3">32</td><td colspan="3">63</td></tr><tr><td>Pole</td><td>3</td><td>4</td><td>5</td><td>3</td><td>4</td><td>5</td><td>3</td><td>4</td><td>5</td></tr><tr><td>d</td><td>123</td><td>131</td><td>131</td><td>155</td><td>155</td><td>155</td><td>240</td><td>240</td><td>240</td></tr><tr><td>Øe</td><td>51</td><td>65</td><td>65</td><td>73</td><td>73</td><td>73</td><td>81</td><td>81</td><td>81</td></tr><tr><td>f</td><td>60</td><td>68</td><td>75</td><td>79</td><td>79</td><td>88</td><td>97</td><td>97</td><td>97</td></tr><tr><td>m</td><td>118</td><td>112</td><td>112</td><td>133</td><td>133</td><td>133</td><td>192</td><td>192</td><td>192</td></tr><tr><td>n</td><td>37</td><td>37</td><td>37</td><td>46</td><td>46</td><td>46</td><td>67</td><td>67</td><td>67</td></tr><tr><td>Øp</td><td>7,5-14,5</td><td>7,5-14,5</td><td>7,5-14,5</td><td>10-19,5</td><td>10-19,5</td><td>10-19,5</td><td>18-34,5</td><td>18-34,5</td><td>18-34,5</td></tr></table>	Amp.	16			32			63			Pole	3	4	5	3	4	5	3	4	5	d	123	131	131	155	155	155	240	240	240	Øe	51	65	65	73	73	73	81	81	81	f	60	68	75	79	79	88	97	97	97	m	118	112	112	133	133	133	192	192	192	n	37	37	37	46	46	46	67	67	67	Øp	7,5-14,5	7,5-14,5	7,5-14,5	10-19,5	10-19,5	10-19,5	18-34,5	18-34,5	18-34,5	Stecker, Schraubanschluss, mit Trompetenverschraubung, IP 44 ⚡
Amp.	16			32			63																																																																											
Pole	3	4	5	3	4	5	3	4	5																																																																									
d	123	131	131	155	155	155	240	240	240																																																																									
Øe	51	65	65	73	73	73	81	81	81																																																																									
f	60	68	75	79	79	88	97	97	97																																																																									
m	118	112	112	133	133	133	192	192	192																																																																									
n	37	37	37	46	46	46	67	67	67																																																																									
Øp	7,5-14,5	7,5-14,5	7,5-14,5	10-19,5	10-19,5	10-19,5	18-34,5	18-34,5	18-34,5																																																																									
	<table><tr><td>Amp.</td><td>16</td></tr><tr><td>Pole</td><td>3</td></tr><tr><td>d</td><td>126</td></tr><tr><td>m</td><td>110</td></tr><tr><td>n</td><td>37</td></tr><tr><td>u</td><td>72</td></tr><tr><td>Øp</td><td>7,5-14,5</td></tr></table>	Amp.	16	Pole	3	d	126	m	110	n	37	u	72	Øp	7,5-14,5	Stecker, Schraubanschluss, mit Trompetenverschraubung IP 67 ⚡⚡																																																																		
Amp.	16																																																																																	
Pole	3																																																																																	
d	126																																																																																	
m	110																																																																																	
n	37																																																																																	
u	72																																																																																	
Øp	7,5-14,5																																																																																	
	<table><tr><td>Amp.</td><td>16</td><td>16</td><td>32</td><td>32</td></tr><tr><td>Pole</td><td>4</td><td>5</td><td>3 / 4</td><td>5</td></tr><tr><td>d</td><td>150-161</td><td>150-161</td><td>174-183</td><td>174-183</td></tr><tr><td>Ø e</td><td>Ø 65</td><td>Ø 65</td><td>Ø 72</td><td>Ø 72</td></tr><tr><td>m</td><td>111</td><td>111</td><td>127</td><td>127</td></tr><tr><td>n</td><td>36,5</td><td>36,5</td><td>45,5</td><td>45,5</td></tr><tr><td>Ø u</td><td>Ø 81</td><td>Ø 89</td><td>Ø 95</td><td>Ø 100</td></tr><tr><td>Ø p</td><td>7,5-18,5</td><td>7,5-18,5</td><td>10-22,5</td><td>10-22,5</td></tr></table>	Amp.	16	16	32	32	Pole	4	5	3 / 4	5	d	150-161	150-161	174-183	174-183	Ø e	Ø 65	Ø 65	Ø 72	Ø 72	m	111	111	127	127	n	36,5	36,5	45,5	45,5	Ø u	Ø 81	Ø 89	Ø 95	Ø 100	Ø p	7,5-18,5	7,5-18,5	10-22,5	10-22,5	Stecker mit Schraubanschluss, mit Kabelverschraubung, IP 67 ⚡⚡ oder Stecker schraubenlos (SL) mit Schneidklemmtechnik, mit Kabelverschraubung, IP 67 ⚡⚡																																								
Amp.	16	16	32	32																																																																														
Pole	4	5	3 / 4	5																																																																														
d	150-161	150-161	174-183	174-183																																																																														
Ø e	Ø 65	Ø 65	Ø 72	Ø 72																																																																														
m	111	111	127	127																																																																														
n	36,5	36,5	45,5	45,5																																																																														
Ø u	Ø 81	Ø 89	Ø 95	Ø 100																																																																														
Ø p	7,5-18,5	7,5-18,5	10-22,5	10-22,5																																																																														
	<table><tr><td>Amp.</td><td colspan="3">63</td><td colspan="3">125</td></tr><tr><td>Pole</td><td>3</td><td>4</td><td>5</td><td>3</td><td>4</td><td>5</td></tr><tr><td>d</td><td>243</td><td>243</td><td>243</td><td>315</td><td>315</td><td>315</td></tr><tr><td>m</td><td>195</td><td>195</td><td>195</td><td>258</td><td>258</td><td>258</td></tr><tr><td>n</td><td>67</td><td>67</td><td>67</td><td>75,5</td><td>75,5</td><td>75,5</td></tr><tr><td>u</td><td>110</td><td>110</td><td>110</td><td>130</td><td>130</td><td>130</td></tr><tr><td>Øp</td><td>18-35</td><td>18-35</td><td>18-35</td><td>24-45</td><td>24-45</td><td>24-45</td></tr></table>	Amp.	63			125			Pole	3	4	5	3	4	5	d	243	243	243	315	315	315	m	195	195	195	258	258	258	n	67	67	67	75,5	75,5	75,5	u	110	110	110	130	130	130	Øp	18-35	18-35	18-35	24-45	24-45	24-45	Stecker, Schraubanschluss, mit Trompetenverschraubung, IP 67 ⚡⚡																															
Amp.	63			125																																																																														
Pole	3	4	5	3	4	5																																																																												
d	243	243	243	315	315	315																																																																												
m	195	195	195	258	258	258																																																																												
n	67	67	67	75,5	75,5	75,5																																																																												
u	110	110	110	130	130	130																																																																												
Øp	18-35	18-35	18-35	24-45	24-45	24-45																																																																												

 2 P + E  3 P + E  3 P + N + E	Ampère	Polzahl	110 V 50 u. 60 Hz 3pol. 4h 4h 4h	230 V 50 u. 60 Hz 3pol. 6h 9h 9h	400 V 50 u. 60 Hz 3pol. 9h 6h 6h	500 V 50 u. 60 Hz 3pol. 7h 7h 7h	> 50 - 500 V 100 - 300 Hz 3pol. 10h 10h 10h	> 50 - 500 V ü. 300 - 500 Hz 3pol. 2h 2h 2h		 g
Artikelnummern										
	16	5							10	180
	32	5							10	257
Abb. 230 PH										
	16	5							10	174
	32	5							10	245
Abb. 231 PH										
	16	3	211 304	211 306	211 309				10	112
	16	4	211 404	211 409	211 406	211 407	211 410	211 402	10	154
	16	5	211 504	211 509	211				10	170
	32	3	231 304	231 306	231 309				10	211
	32	4	231 404	231 409	231 406	231 407	231 410	231 402	10	217
	32	5	231 504	231 509	231				10	240
	63	3	261 304	261 306	261 309				5	475
	63	4	261 404	261 409	261 406	261 407	261 410	261 402	5	566
	63	5	261 504	261 509	261				5	613
Abb. 231										
	16	3	219 304	219 306	219 309				10	133
Abb. 219306										
	16	4	219 404	219 409	219 406	219 407	219 410	219 402	10	212
	16	5	219 504	219 509	219				10	236
	32	3	239 304	239 306	239 309				10	290
	32	4	239 404	239 409	239 406	239 407	239 410	239 402	10	300
	32	5	239 504	239 509	239				10	340
Abb. 239										
Die hier aufgeführten Stecker sind auch als schraubenlose Version mit Schneidklemmtechnik erhältlich. Zum Bestellen der <u>schraubenlosen Version</u> einfach „ SL “ hinter der Art.-Nr. einfügen!										
	63	3	269 304	269 306	269 309				5	501
	63	4	269 404	269 409	269 406	269 407	269 410	269 402	5	623
	63	5	269 504	269 509	269				5	668
	125	3	279 304	279 306	279 309				2	1185
	125	4	279 404	279 409	279 406	279 407	279 410	279 402	2	1329
	125	5	279 504	279 509	279				2	1473
Abb. 269										

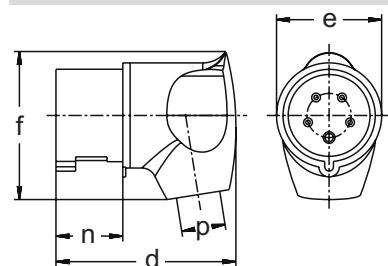


Amp.	16			32		
Pole	3	4	5	3	4	5
d	85	98	98	115	115	115
e	50,3	64,3	64,3	72	72	72
f	70	86	86	96	96	100
n	37	37	37	45,8	45,8	45,8
p	8/15	10/16,5	10/16,5	11/22	11/22	11/22

mondo Winkelstecker, Schraubanschluss,
Hinterteil RAL 7035 lichtgrau,
IP 44

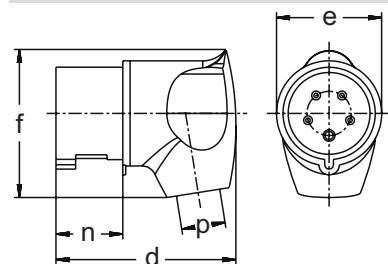


Amp.	16			32		
Pole	3	4	5	3	4	5
d	85	98	98	115	115	115
e	50,3	64,3	64,3	72	72	72
f	70	86	86	96	96	100
n	37	37	37	45,8	45,8	45,8
p	8/15	10/16,5	10/16,5	11/22	11/22	11/22

mondo Winkelstecker, Schraubanschluss,
Hinterteil RAL 1013 perlweiß,
IP 44

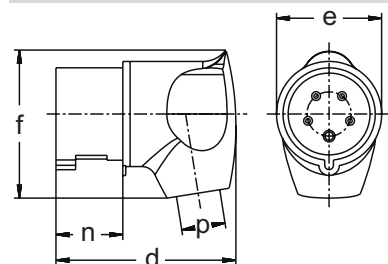


Amp.	16			32		
Pole	3	4	5	3	4	5
d	85	98	98	115	115	115
e	50,3	64,3	64,3	72	72	72
f	70	86	86	96	96	100
n	37	37	37	45,8	45,8	45,8
p	8/15	10/16,5	10/16,5	11/22	11/22	11/22

mondo Winkelstecker, Schraubanschluss,
Hinterteil RAL 9010 reinweiß,
IP 44

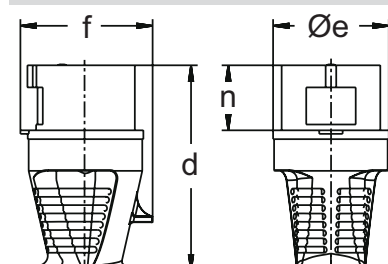


Amp.	16		32		63	
Pole	4	5	4	5	4	5
d	65	65	155	72	240	81
Øe	58	65	72	72	81	81
f	68	75	79	88	97	97
n	37	37	46	46	67	67

Prüfstecker für Drehfeldrichtung,
IP 44

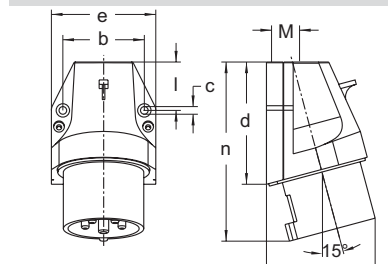

Amp.	16			32		
Pole	3	4	5	3	4	5
b	45,5	60	60	60	60	60
c	5,3	5,3	5,3	5,3	5,3	5,3
d	74	80	80	97	97	97
e	60	74	74	82	82	82
f	60	73	73	80	80	86
l	28	31	31	45	45	45
n	110	117	117	141	141	141
M	20	20	20	25	25	25

Wandgerätestecker, Außenbefestigung,
1 Kabeleinführung oben,
IP 44

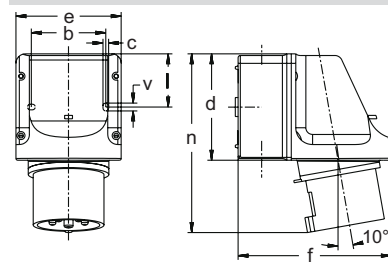

Amp.	16		32	
Pole	4	5	3	5
b	66,5	66,5	66,5	66,5
c	5	5	5	5
d	96	96	96	96
e	95	95	95	95
f	140	140	140	140
l	47,5	47,5	47,5	47,5
n	151	151	160	160
v	7	7	7	7
M	20/25	20/25	20/25	20/25

Wandgerätestecker, Innenbefestigung,
Kabeleinführung 2 x oben und unten, aus-
brechbar,
1 x Bodeneinführung ausbrechbar,
IP 44



Ampère
Polzahl

110 V
50 u. 60 Hz
3pol. 4h 4h 4h

230 V
50 u. 60 Hz
3pol. 6h 9h 9h

400 V
50 u. 60 Hz
3pol. 9h 6h 6h

500 V
50 u. 60 Hz
3pol. 7h 7h 7h

> 50 - 500 V
100 - 300 Hz
3pol. 10h 10h 10h

> 50 - 500 V
ü. 300 - 500 Hz
3pol. 2h 2h 2h



Abb. 236



Abb. 236 PW



Abb. 236 RW



Abb. 230DF




Abb. 630



Abb. 636


Artikelnummern

16	3	216 304	216 306	216 309				10	106
16	4	216 404	216 409	216 406	216 407	216 410	216 402	10	150
16	5	216 504	216 509	216				10/60	163
32	3	236 304	236 306	236 309				10	214
32	4	236 404	236 409	236 406	236 407	236 410	236 402	10	230
32	5	236 504	236 509	236				10	251
16	3		216 306 PW					10	106
16	4			216 406 PW				10	150
16	5			216 PW				10	163
32	3		236 306 PW					10	214
32	4			236 406 PW				10	230
32	5			236 PW				10	251
16	3		216 306 RW					10	106
16	4			216 406 RW				10	150
16	5			216 RW				10	163
32	3		236 306 RW					10	214
32	4			236 406 RW				10	230
32	5			236 RW				10	251
16	4		für Spannungsbereiche von 110 V - 690 V					10	144
16	5			210 406 DF				10	173
32	4			210 DF				10	198
32	5			230 406 DF				10	241
63	4			230 DF				10	241
63	5			260 406 DF				10	603
				260 DF				5	685
16	3	610 304	610 306	610 309				10	126
16	4	610 404	610 409	610 406	610 407	610 410	610 402	10	164
16	5	610 504	610 509	610				10/60	177
32	3	630 304	630 306	630 309				10	219
32	4	630 404	630 409	630 406	630 407	630 410	630 402	10	237
32	5	630 504	630 509	630				10	256
16	4	616 404	616 409	616 406	616 407	616 410	616 402	5	323
16	5	616 504	616 509	616				5	352
32	3	636 304	636 306	636 309				5	349
32	4	636 404	636 409	636 406	636 407	636 410	636 402	5	372
32	5	636 504	636 509	636				5	399

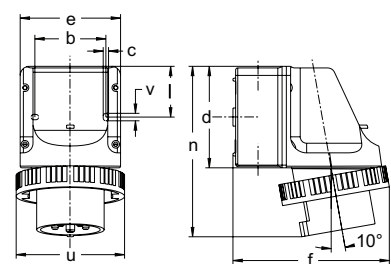


Amp.	16			32		
Pole	3	4	5	3	4	5
b	66,5	66,5	66,5	66,5	66,5	66,5
c	5	5	5	5	5	5
d	96	96	96	96	96	96
e	95	95	95	95	95	95
f	140	140	140	147	147	150
l	47,5	47,5	47,5	47,5	47,5	47,5
n	154	154	154	164	164	164
u	72	81	88	96	96	103
v	7	7	7	7	7	7
M	20/25	20/25	20/25	20/25	20/25	20/25

Wandgerätestecker,
Innenbefestigung,
Kabeleinführung 2 x oben und unten, aus-
brechbar,
1 x Bodeneinführung ausbrechbar,
IP 67



Amp.	63		
Pole	3	4	5
a	136	120	120
b	104	106	106
c	6	5,6	5,6
d	170	152	152
e	118	118	118
f	171	118	118
n	250	232	232
u	113	113	113
M	40	40	40


Wandgerätestecker,
Außenbefestigung,
1 Kabeleinführung oben,
Kontakte unvernickelt
IP 67



Amp.	125		
Pole	3	4	5
a	240	240	240
b	200	200	200
c	7	7	7
d	263	263	263
e	220	220	220
f	175	175	175
n	390	390	390
u	130	130	130
M1	50/20	50/20	50/20
M2	40	40	40


Wandgerätestecker,
Innenbefestigung,
Kabeleinführung oben 1 x M 50 und 1 x M
20, Kabeleinführung unten 2 x M 40,
3-polig: mit Klemmsatz 3 x 50 mm²,
4-polig: mit Klemmsatz 4 x 50 mm²,
5-polig: mit Klemmsatz 5 x 50 mm²,
IP 67

OK = ohne Klemmsatz




Amp.	16	32
Pole	5	5
b	60	60
c	5,3	5,3
d	80	97
e	74	82
f	73	86
l	31	45
n	117	141
M	20	25

Wandgerätestecker als Phasenwender,
Außenbefestigung,
1 Kabeleinführung oben,
IP 44

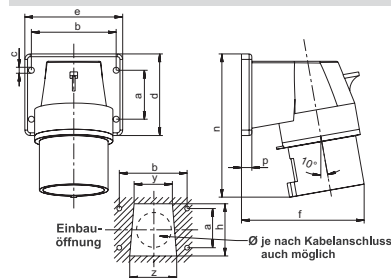

Amp.	16			32			63		
Pole	3	4	5	3	4	5	3	4	5
a	30	40	40	45	45	45	90	90	90
b	55	68	68	78	78	78	90	90	90
c	5,5	5,5	5,5	5,5	5,5	5,5	6,2	6,2	6,2
d	52	66	66	75	75	75	114	114	114
e	65	80	80	90	90	90	114	114	114
f	72	90	92	103	103	103	116	116	116
h	38	52	52	60	60	60	70	70	70
n	97	110	110	129	129	129	185	185	185
p	9,5	9,5	9,5	9,5	9,5	9,5	6	6	6
y	30	38	38	44	44	44	56	56	56
z	36	46	46	54	54	54	65	65	65

Anbaugerätestecker,
schräg, Flanschgehäuse angeschraubt,
IP 44

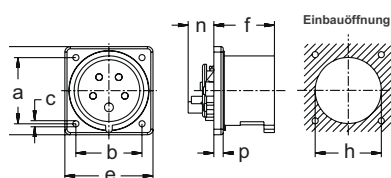

Amp.	16			32			63		
Pole	3	4	5	3	4	5	3	4	5
a	47	60	60	60	60	60	60	60	60
b	47	60	60	60	60	60	60	60	60
c	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5	5,5
d	62	80	80	80	80	80	80	80	80
e	62	80	80	80	80	80	80	80	80
f	47	47	47	56	56	56	56	56	56
h	50	67	67	71	71	71	71	71	71
n	22	22	22	22	22	22	22	22	22
p	8,5	8,5	8,5	8,5	8,5	8,5	8,5	8,5	8,5

Anbaugerätestecker,
gerade, Flansch angeschraubt,
IP 44

- geräteseitig ist eine
Verriegelungsnase vorzusehen -

*) Version 3 x 16 A alternativ auch
mit Flansch 75 x 75 mm erhältlich



Ampère
Polzahl

110 V
50 u. 60 Hz
3pol. 4h 4h 4h

230 V
50 u. 60 Hz
3pol. 6h 9h 9h

400 V
50 u. 60 Hz
3pol. 9h 6h 6h

500 V
50 u. 60 Hz
3pol. 7h 7h 7h

> 50 - 500 V
100 - 300 Hz
3pol. 10h 10h 10h

> 50 - 500 V
ü. 300 - 500 Hz
3pol. 2h 2h 2h



Artikelnummern



Abb. 638

16	3	618 304	618 306	618 309	Oberteil ohne Verriegelungsnase			5	357
16	4	618 404	618 409	618 406	618 407	618 410	618 402	5	328
16	5	618 504	618 509	618 618				5	357
32	3	638 304	638 306	638 309				5	421
32	4	638 404	638 409	638 406	638 407	638 410	638 402	5	427
32	5	638 504	638 509	638 638				5	463



Abb. 668

63	3	668 304	668 306	668 309				2	825
63	4	668 404	668 409	668 406	668 407	668 410	668 402	2	827
63	5	668 504	668 509	668 668				2	891



Abb. 678

125	3	678 304	678 306	678 309				1	2700
125	4	678 404	678 409	678 406	678 407	678 410	678 402	1	3005
125	5	678 504	678 509	678 678				1	3800
125	3	678 304 OK	678 306 OK	678 309 OK				1	860
125	4	678 404 OK	678 409 OK	678 406 OK	678 407 OK	678 410 OK	678 402 OK	1	1455
125	5	678 504 OK	678 509 OK	678 678 OK				1	2250



Abb. 630PH

16	5			610 PH				10	184
32	5			630 PH				10	264




Abb. 631

16	3	611 304	611 306	611 309				10	122
16	4	611 404	611 409	611 406	611 407	611 410	611 402	10	176
16	5	611 504	611 509	611 611				10	207
32	3	631 304	631 306	631 309				10	230
32	4	631 404	631 409	631 406	631 407	631 410	631 402	10	293
32	5	631 504	631 509	631 631				10	276
63	3	661 304	661 306	661 309				5	456
63	4	661 404	661 409	661 406	661 407	661 410	661 402	5	513
63	5	661 504	661 509	661 661				5	553



Abb. 635


16	3	600 304 *	600 306 *	600 309 *				10	105
16	3	615 304	615 306	615 309				10	94
16	4	615 404	615 409	615 406	615 407	615 410	615 402	10	131
16	5	615 504	615 509	615 615				10	145
32	3	635 304	635 306	635 309				10	150
32	4	635 404	635 409	635 406	635 407	635 410	635 402	10	166
32	5	635 504	635 509	635 635				10	191

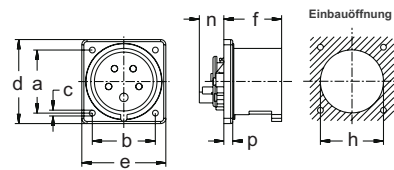

Amp.	16	32
Pole	5	5
a	60	60
b	60	60
c	5,5	5,5
d	80	80
e	80	80
f	47	56
h	67	71
n	22	22
p	8,5	8,5


Anbaugerätestecker als Phasenwender
gerade, Flansch angeschraubt,
IP 44

- am Gerät ist eine
Verriegelungsnase vorzusehen -

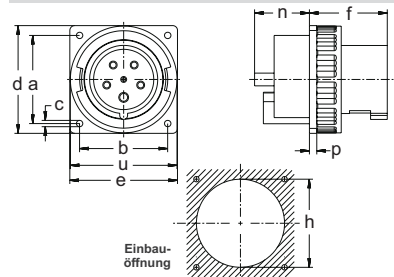


Amp.	125		
Pole	3	4	5
a	104	104	104
b	104	104	104
c	6,5	6,5	6,5
d	130	130	130
e	130	130	130
f	93	93	93
h	90	90	90
n	56	56	56
p	7,5	7,5	7,5
u	130	130	130

Anbaugerätestecker,
gerade, Flansch angeschraubt,
IP 67

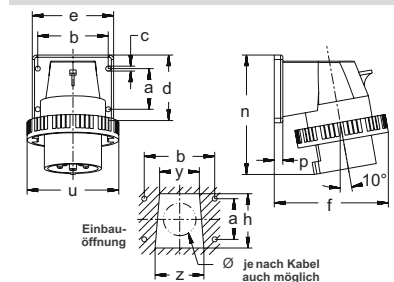


Amp.	16			32			63		
Pole	3	4	5	3	4	5	3	4	5
a	30	40	40	45	45	45	90	90	90
b	55	68	68	78	78	78	90	90	90
c	5,5	5,5	5,5	5,5	5,5	5,5	6,2	6,2	6,2
d	52	66	66	75	75	75	114	114	114
e	65	80	80	90	90	90	114	114	114
f	81	99	103	111	111	117	129	129	129
h	38	52	52	60	60	60	90	90	90
n	98	111	113	131	131	131	184	184	184
p	9,5	9,5	9,5	9,5	9,5	9,5	6	6	6
u	72	81	88	96	96	103	110	110	110
y	30	38	38	44	44	44	56	56	56
z	36	46	46	54	54	54	65	65	65

Anbaugerätestecker,
schräg, Flanschgehäuse angeschraubt,
IP 67

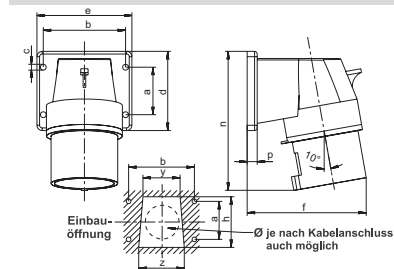


Amp.	16	32
Pole	5	5
a	40	45
b	68	78
c	5,5	5,5
d	66	75
e	80	90
f	92	103
h	52	60
n	110	129
p	9,5	9,5
y	38	44
z	46	54

Anbaugerätestecker als Phasenwender,
schräg, Flanschgehäuse angeschraubt,
IP 44

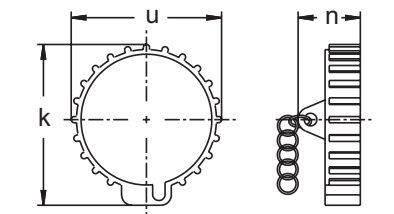

Amp.	16	
Pole	3	5
k	48	60
n	24	20
u	52	65

Schutzkappen
für Stecker und Gerätestecker,
mit Anbausatz,
IP 44

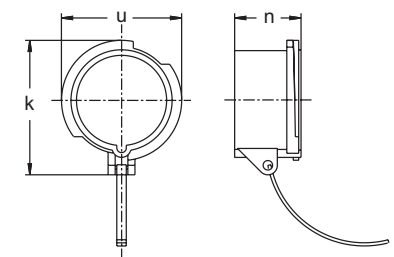

Amp.	16			32		
Pole	3	4	5	3	4	5
k	70	79	86	91	91	99
n	41	41	42	51	51	52
u	60	68	76	82	82	89

Amp.	63			125		
Pole	3	4	5	3	4	5
k	108	108	108	119	119	119
n	73	73	73	79	79	79
u	95	95	95	108	108	108

Schutzkappen
für Stecker und Gerätestecker,
mit Anbausatz,
IP 67



Ampère
Polzahl

110 V
50 u. 60 Hz
3pol. 4h 4h 4h

230 V
50 u. 60 Hz
3pol. 6h 9h 9h

400 V
50 u. 60 Hz
3pol. 9h 6h 6h

500 V
50 u. 60 Hz
3pol. 7h 7h 7h

> 50 - 500 V
100 - 300 Hz
3pol. 10h 10h 10h

> 50 - 500 V
ü. 300 - 500 Hz
3pol. 2h 2h 2h



Artikelnummern										
	16	5			615 PH				10	145
	32	5			635 PH				10	191
Abb. 635PH										
	125	3	679 304	679 306	679 309				2	673
	125	4	679 404	679 409	679 406	679 407	679 410	679 402	2	910
	125	5	679 504	679 509	679				2	1147
Abb. 679										
	16	3	619 304	619 306	619 309				10	195
	16	4	619 404	619 409	619 406	619 407	619 410	619 402	10	206
	16	5	619 504	619 509	619				10	217
	32	3	639 304	639 306	639 309				5	223
	32	4	639 404	639 409	639 406	639 407	639 410	639 402	5	259
	32	5	639 504	639 509	639				5	295
	63	3	669 304	669 306	669 309				5	525
	63	4	669 404	669 409	669 406	669 407	669 410	669 402	5	569
	63	5	669 504	669 509	669				5	613
Abb. 639										
	16	5			611 PH				10	205
	32	5			631 PH				10	283
Abb. 631PH										
			für Ampère	für Polzahl	Artikelnummer					
			16	3	614 300				10	12
			16	5	614 500				10	19
Abb. 614500										
			16	3	613 300				10	34
			16	4	613 400				10	36
			16	5	613 500				10	54
			32	3	633 400				10	59
			32	4	633 400				10	59
			32	5	633 500				10	59
			63	3	663 500				10	108
			63	4	663 500				10	108
			63	5	663 500				10	108
			125	3	673 500				10	115
			125	4	673 500				10	115
			125	5	673 500				10	115
Abb. 633500										